


Amana Gas Slide-In Ranges:

Fax Document Number: 4042 / 030401

Models	ACS3350A
General	
Porcelain Self-Cleaning Oven	3.7 cu.ft.
Touchmatic Electronic Range Control (ERC)	Yes
Exclusive Die-Cast Sealed Burners	Yes
Exclusive One-Piece Porcelain Burner Grates	Yes
Center Trivet Grate	Yes
One-Piece Porcelain Burner Bowls	Yes
Delay Bake and Self-Clean	Yes
Self-Clean, Preheat & Bake Indicator Lights	Displayed in ERC
Exclusive Insta-Broil™ Broiling System	Yes
2 Oven Racks with 5 Positions	Yes
Porcelain Broiler Pan and Grid	Yes
Removable Counter-Balanced Glass Oven Door w/ Extra-Large Window	Yes
Towel Bar Oven Door Handle	Yes
Auto Self-Clean Latch	Yes
Auto / Manual Interior Oven Light	Yes
Full Width Storage Drawer, Glides on Rollers	Yes
Angled Control Panel	Yes
Optional 4" Backguard Kit	Yes – AXF100
12 Hour Shut Off	Yes
Colors	
White	ACS3350AW
Bisque	ACS3350AC
Black	ACS3350AB
Stainless Steel	ACS3350AS
Burners (BTU's Nat./LP)	
2 Large – Rt. Front & Lft. Rear	12,500 / 10,000
1 Medium – Rt. Rear	9,100 / 8,000
1 Small – Lft. Front	5,000 / 4,000
Oven (BTU's Nat./LP)	
Bake	15,500 / 15,500
Insta-Broil™	14,000 / 13,000
Agency Approvals	
AGA	Yes
Warranty	Warranty applies only when product is repaired by an authorized Amana servicer.
Entire Appliance	Full 1 year - parts, labor & travel Limited 2 - 5 years on gas surface Burners - parts only
Electrical	
Electrical Requirements	120 VAC, 60 Hz, 3-wire, single phase, 15 Amp

Models	ACS3350A
Oven Interior Dimensions (in Inches)	
Height	16
Width	23
Depth	17 1/2
Exterior Dimensions (in Inches)	
Height Overall, Including Back Vent	38
Height of Cooktop	36
Width of Unit Including Overlapping Top Side Trim	31
Width of Unit Excluding Overlapping Top Side Trim	30
Depth of Unit not Including Overlapping Trim, Oven Door Closed with Handle	27 1/2
Depth of Unit Including Overlapping Trim, Oven Door Closed w/Handle	28 3/4
Clearance, Oven Door	20
Approximate Shipping Weight (lbs.)	230
Cutout Dimensions (in Inches)	
A: Width	30 1/8 to 30 1/4
B: Cabinet & Countertop Height	36
C: Cabinet Height	35
D: Depth - Flush with Cabinet Back	23
E: Distance between Rear of Cutout and Vertical Surface (min.)	1/2


Standard Cabinet and Countertop Height and Depth

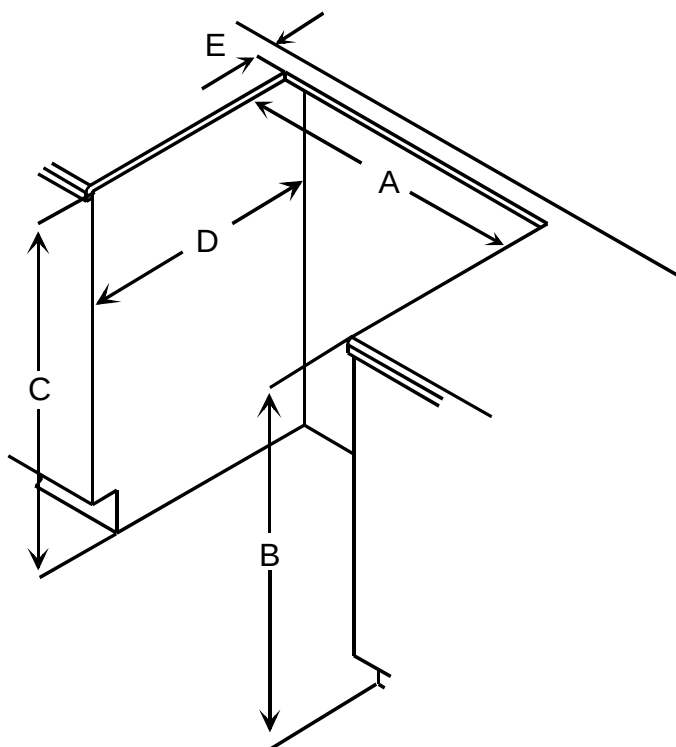

Electrical Connection Clearance

Electrical connection must be located in the area shown in Figure to the right. Electrical connection must not interfere with gas connection.


- A - 2 inches
- B - 19 1/2 inches
- C - 12 inches
- D - 6 inches

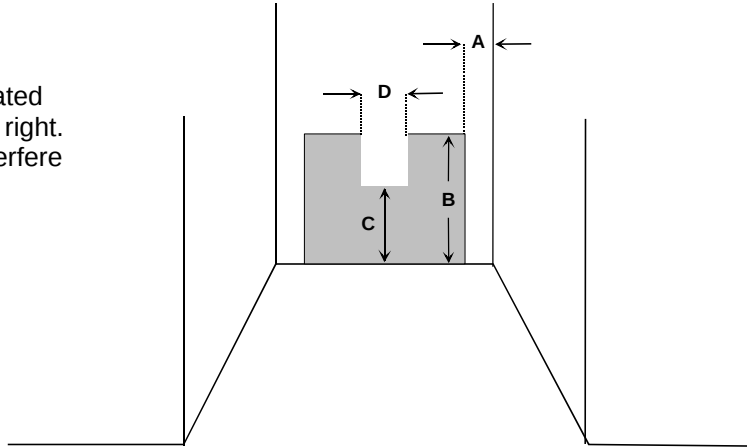



Gas Supply Location

Gas supply must be located in the area shown in Figure to the right. Gas connection must not interfere with the electrical connection.

- A - 18 inches
- B - 12 inches
- C - 3 1/2 inches
- D - 6 inches

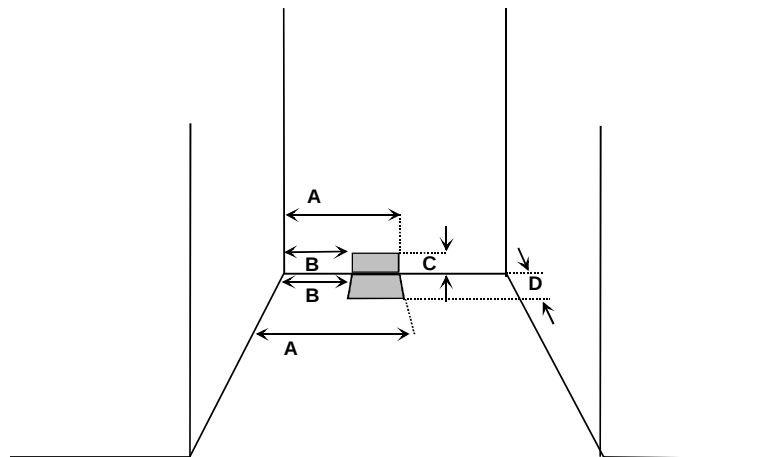

Countertop Opening

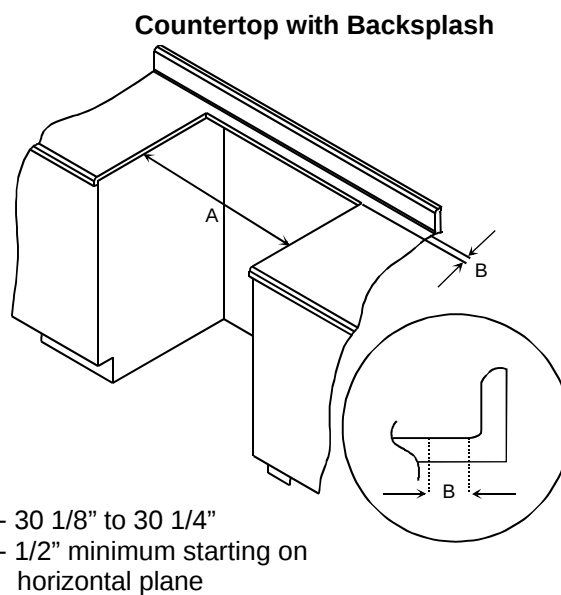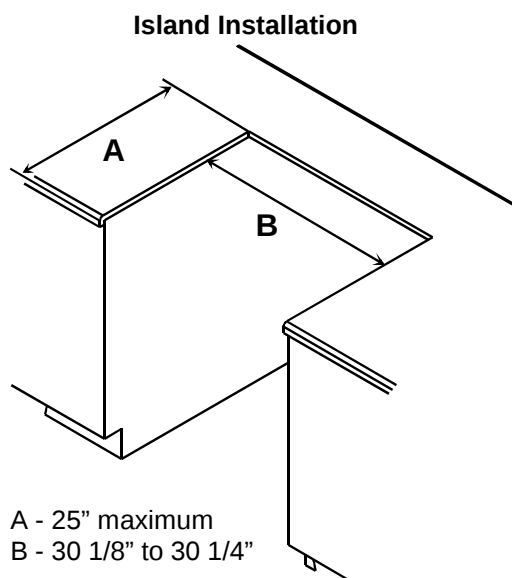

Minimum Clearances to Combustible Surfaces

